



HASSLE FREE DEPENDABLE LIGHTING AND POWER ANYWHERE – ANYTIME

ENGINEERED FOR PERFORMANCE.



High Lumen
Output



Power
Backup



Compact &
Mobile



Smart
Features



Rugged
Design





MLT 5

MOBILE LIGHTING HAS EVOLVED

NEXT GENERATION MOBILE LIGHT MAST


Designed from the ground up, MLT 5 is optimized for LED, delivering an unparalleled lighting performance from a robust, 5-meter light tower that fits in your car.





FEATURES

LIGHTING PERFORMANCE

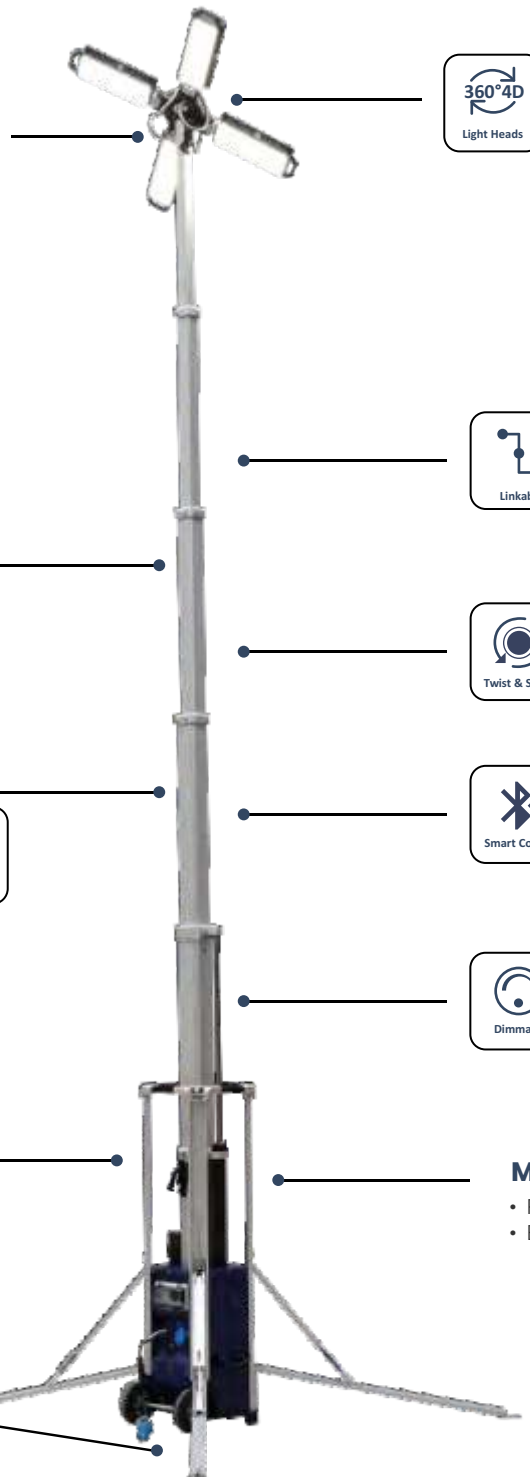

SIMPLE, FOLD OUT, FULLY
ROTATIONAL LIGHT HEADS FOR
ANY DESIRED CONFIGURATION



LINK UP TO 3 UNITS FROM
A SINGLE POWER SOURCE



TWIST & SWAP NEMA SOCKET
FOR LIGHT CONTROL SOLUTIONS



CONTROL, DIM & SCHEDULE
LIGHTS REMOTELY




NIGHT MODE LIGHT REDUCTION
MINIMIZES ENERGY CONSUMPTION
& DISRUPTION TO TRAFFIC AND
RESIDENTIAL AREAS

OPERATION



SAFETY & STABILITY



MAST



ULTRA COMPACT & LIGHT WEIGHT



MOBILITY

- PUNCTURE PROOF ALL TERRAIN TYRES
- ERGONOMIC HANDLES

SAFETY & STABILITY

Patented Triple Drop Prevention System (TDP) makes the mast very safe to use.



- 1 INDIVIDUAL WIRES
- 2 AUTO STOP RAISING/
LOWERING
- 3 DROP PREVENTION




COMPLETE LIGHTING FLEXIBILITY

With professional grade optics and up to 112,000 lumens, MLT 5 delivers a more powerful lighting performance than anything in its class.




BRILLIANT LIGHT DISTRIBUTION

Direct the light where you need it. The flexible lamp head makes it possible to have the light exactly where required

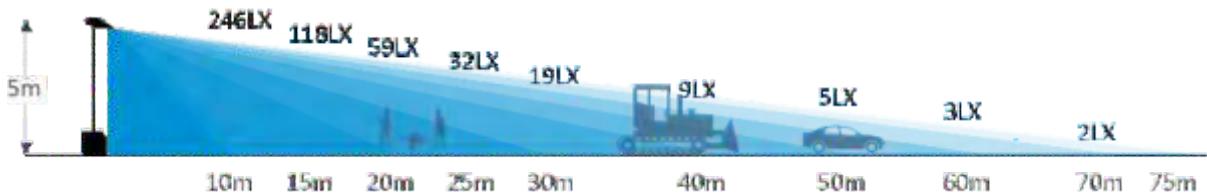


Large illuminated area of **2,200m²** with minimum **5 lux** and an average of **39 lux**

All lights facing forward

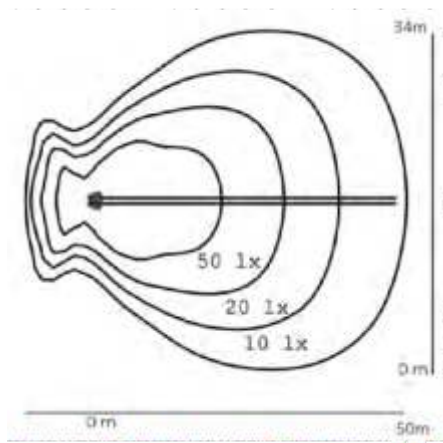

Lights facing 4 directions

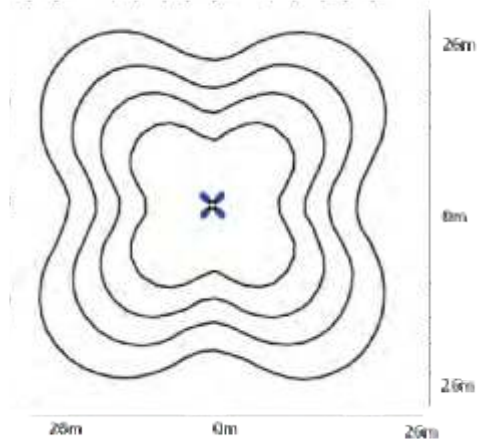



TAKE CONTROL OF YOUR LIGHTING

- Equipped as standard with twist & swap NEMA socket for lighting controls
- Manual ON/OFF & night mode

STANDARD

- Daylight Sensing: Maximize efficiency in combination with natural daylight

DESIGNED AND TESTED IN TOUGH ENVIRONMENTS

From the harsh Scandinavian winters, to the hot, rugged terrain of mining regions, Mlit is built to thrive, providing extremely energy-efficient light in all climates.

TECH SPEC

Model

Series	Mlit
Model No.	MLT 5

Performance

Illuminated Surface	2200 m ²
System Power	800W
Luminous Flux	112.000 lm
Lumen/W	140
Beam Profile	60
Color Temperature (CCT)	5000K

Electrical

Operating Voltage	100-305VAC/50Hz
Dimmable	Yes
Input Plug	CEE 230V
Protection	Over Voltage / Over Temp. / Short Circuit

Environmental

Ambient Operating Temp. range	-30°C to +45°C
Storage Temp. Range	-40°C to +80°C
IK class	IK08
IP class	IP65 (lighting) / IP54 (chassi)
Noise Emissions	<5dB(A)

Physical

Fully extended height	5.1 meters
Elevation system	Electric
Mast Rotation	340
Mobility	By hand/ Crane/
Dimensions (min.)	358 x 427 x 1200mm
Dimensions (max.)	1640 x 1640 x 5100mm
Weight	49kg
Wind Resistance	30 m/s
Housing Finish	UV stabilised powder coating

Approvals

Certifications	CE
Service life L80 B50 (LED)	>100,000 h



MLT7

COMPACT. BRIGHTER. SMARTER. SAFER

NEXT GENERATION MOBILE LIGHT TOWER, DESIGNED FOR PROFESSIONALS



Mlit easily replaces diesel driven light towers with much less weight and a fraction of the energy required, delivering low glare, brilliant light coverage in half the size of standard light towers.





FEATURES

LIGHTING PERFORMANCE

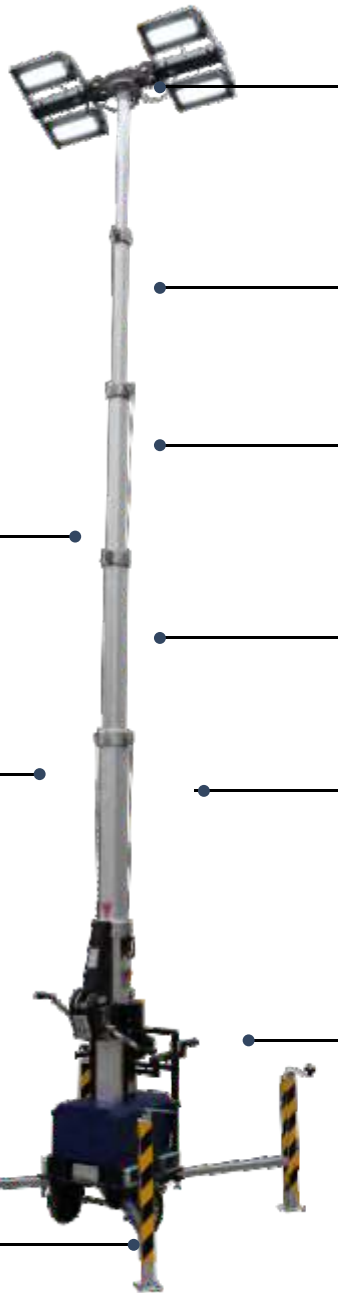

SIMPLE, FOLD OUT, FULLY ROTATIONAL LIGHT HEADS FOR ANY DESIRED CONFIGURATION



LINK UP TO 2 UNITS FROM A SINGLE POWER SOURCE



TWIST & SWAP NEMA SOCKET FOR LIGHT CONTROL SOLUTIONS



CONTROL, DIM & SCHEDULE THE LIGHTS REMOTELY WITH TWIST & SWAP NEMA SOCKET FOR LIGHT CONTROL SOLUTIONS



NIGHT MODE LIGHT REDUCTION MINIMIZES ENERGY CONSUMPTION & DISRUPTION TO TRAFFIC AND RESIDENTIAL AREAS

OPERATION



(OPTIONAL ELECTRIC ELEVATION)

MOBILITY


- ADJUSTABLE, RETRACTABLE HANDLES
- JOCKEY WHEEL
- CRANE HOOK
- LARGE FORKLIFT POCKETS (160X80mm)

TRANSPORT EFFICIENCY



DESIGNED AS THE MOST TRANSPORT EFFICIENT 7-METER LIGHT TOWER AVAILABLE.

Delivering cost savings with each transport to and from site and requiring less storage space when at the depot between rentals.

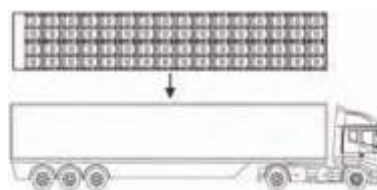

2 UNITS / EURO PALLET



64 UNITS / TRAILER

Twice the quantity of towers compared to other models in the market!






SAFETY & STABILITY

Patented Triple Drop Prevention System (TDP) makes the mast very safe to use.

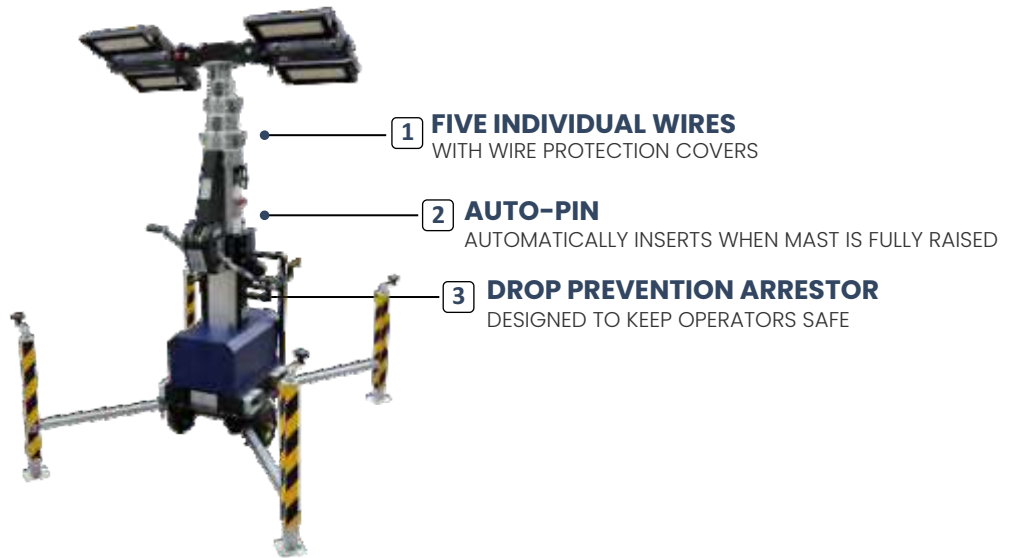


BRILLIANT LIGHT DISTRIBUTION

Ultra asymmetric optics direct light only where it is needed, eliminating unnecessary light pollution and wasted power, whilst delivering a longer distance, stronger light throw.

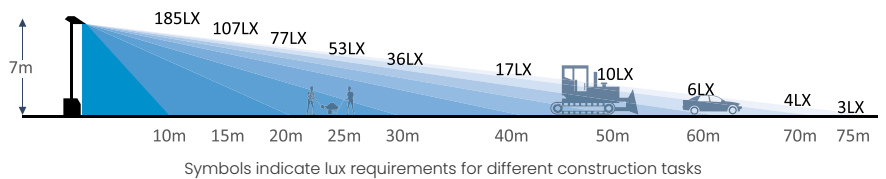

Large illuminated area of **4,296m²** with minimum **5 lux** and an average of **25 lux**

TYPICAL FLOOD LIGHTS

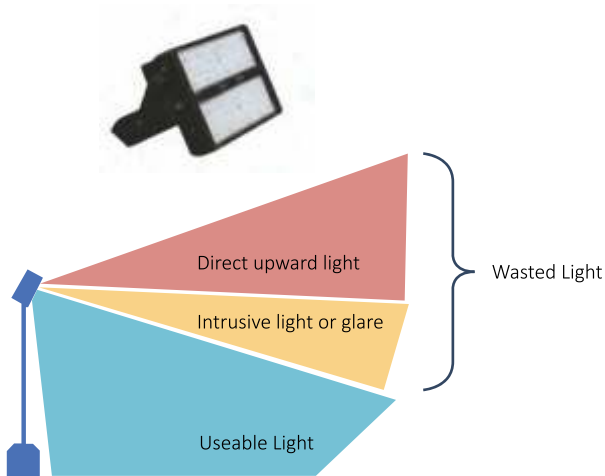

- Components of light pollution.
- Provide less light in desired direction.

MLT 7



- Delivers further, stronger light throw with **+59%** extra light on the ground.
- No direct upward light when facing ground.
- Minimize glare and disturbance to the local environment and traffic.



TAKE CONTROL OF YOUR LIGHTING

- Equipped as standard with twist & swap NEMA socket for lighting controls
- Manual ON/OFF & night mode

STANDARD

- Daylight Sensing: Maximize efficiency in combination with natural daylight

DESIGNED AND TESTED IN TOUGH ENVIRONMENTS

From the harsh Scandinavian winters, to the hot, rugged terrain of mining regions, Mlit is built to thrive, providing extremely energy-efficient light in all climates.

TECH SPEC

Model	
Series	Mlit
Model No.	MLT 7
Performance	
Illuminated Surface	4296 m2
System Power	1200W
Luminous Flux	168,000 lm
Lumen/W	140
Beam Profile	60
Color Temperature (CCT)	5000K
Electrical	
Operating Voltage	220-240VAC/50Hz
Protection	Over Voltage / Over Temp. / Short Circuit
Dimmable	Yes
Input Plug	CEE 230V / Schuko 230V optional

Environmental	
Ambient Operating Temp. range	-30°C to +45°C
Storage Temp. Range	-40°C to +80°C
IK class	IK08
IP class	IP65 (lighting) / IP54 (chassi)
Noise Emissions	<5dB(A)
Physical	
Fully extended height	7.1 meters
Elevation system	Manual (Electric optional)
Mast Rotation	340
Mobility	Forklift pockets, crane hook-By hand
Dimensions (min.)	788 x 658 x 2046mm
Dimensions (max.)	1455 x 1752 x 6930mm
Weight	217kg
Wind Resistance	30 m/s
Housing Finish	UV stabilised powder coating
Approvals	
Certifications	CE
Service life L80 B50 (LED)	>100,000 h



MLT 4

FLEXIBLE LIGHT MAST

TURN YOUR ON-SITE CONTAINERS INTO A LIGHTING PLATFORM

Reduce costs and required space for light masts, the MLT 4 light kit is a simple to install, reliable light system that provides the same or better lighting performance as conventional light towers. Mount on container or concrete base.





LIGHT PERFORMANCE

- Dark sky optics minimize glare and disturbance of surroundings




BUILT TOUGH

- Robust & Resilient construction.



SMART CONTROL

- Fast fix NEMA socket for daylight sensing or wireless control to dim & schedule the lights remotely.



RELIABLE STABILITY

- Telescopic mast with built in safety locks for
- Multiple height configurations.



EASY TO HANDLE

- Simple, reliable, plug and play connections. Designed to be moved and assembled by a single person.

FLEXIBLE POWER OPTIONS

- Direct AC plug in or as a stand-alone system.




SAFE & SECURE MOUNTING




- Fits all types of standard containers.
- Interchangeable mounting plates for side or top mounting to container

BRILLIANT LIGHT DISTRIBUTION

Typical floodlight

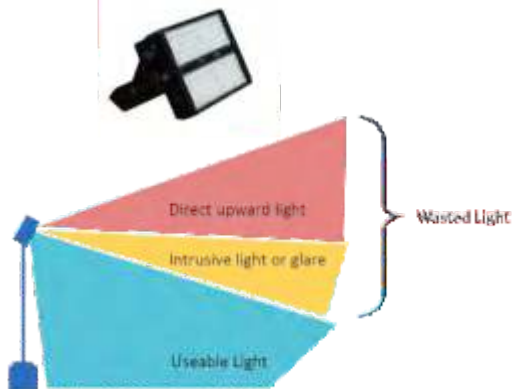

MLT 4

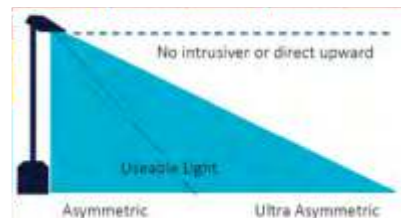



TAKE CONTROL OF YOUR LIGHTING

- Equipped as standard with twist & swap NEMA socket for lighting controls
- Manual ON/OFF & night mode

STANDARD

- Daylight Sensing: Maximize efficiency in combination with natural daylight

DESIGNED AND TESTED IN TOUGH ENVIRONMENTS

From the harsh Scandinavian winters, to the hot, rugged terrain of mining regions, Mlit is built to thrive, providing extremely energy-efficient light in all climates.

TECH SPEC

Model

Series	Mlit
Model No.	MLT 4

Performance

Illuminated Surface	2000 m2
System Power	400W
Luminous Flux	56,000 lm
Lumen/W	140
Beam Profile	Ultra Assymmetric Dark Sky Optics
Color Temperature (CCT)	5000K

Electrical

Operating Voltage	100–305VAC/50Hz
Protection	Over Voltage / Over Temp. / Short Circuit
Dimmable	Yes
Input Plug	CEE 230V

Environmental

Ambient Operating Temp. range	–30°C to +45°C
Storage Temp. Range	–40°C to +80°C
IK class	IK08
IP class	IP65

Physical

Fully extended height	4.4M (6.8M incl. container height)
Adjustable height	1.46 – 4.4M
Elevation system	Manual
Wind Resistance	20 m/s
Material	Stainless steel
Surface Treatment	UV stabilised powder coating
Weight	19kg Light & Mast 6.5kg Power Box

Approvals

Certifications	CE
Service life L80 B50 (LED)	>100,000 h



MLT 3.8

BATTERY LIGHT TOWER

HIGH-PERFORMANCE BATTERY LIGHT TOWER
FOR DEMANDING ENVIRONMENTS

Redefining Mobile Lighting: MLT 3.8 merges the versatility of a compact light tower with the need of rechargeable power, delivering seamless light control and mobility in one innovative solutions.





FROM RAILWAY TO MINES

- Designed for railway maintenance, emergency personnel, construction sites & mines
- A compact light tower with integrated battery makes it perfect match for temporary or emergency work.



BATTERY POWERED MOBILITY

Fuji can be equipped with single or double battery packs. Combining this with a low weight and you have a truly mobile mast solution.



Output %	Output lumens	BLT-300-S /BLT-300-D
100%	48 000lm	1,5/ 3H
75%	36 000lm	2/ 4H
50%	24 000lm	3/ 6H
25%	12 000lm	6H/ 12H
10%	4800lm	15/ 30H



30H



TECH SPEC

Model	
Series	MLit
Model No.	MLT 3.8
Performance	
Illuminated Surface	980 m2 (min 5 lux)
System Power	300W
Luminous Flux	48,000 lm
Lumen/W	160.
Beam Profile	60
Color Temperature (CCT)	5000K
Electrical	
Operating Voltage	100-110VAC/ 220-240VAC/50Hz
Protection	Over Voltage / Over Temp. / Short Circuit
Dimmable	Yes
Input Plug	CEE 230V / Customisable

Environmental	
Ambient Operating Temp. range	-30°C to +45°C
Storage Temp. Range	-40°C to +80°C
IK class	IK08
IP class	IP65 (lighting) / IP54 (chassi)
Noise Emissions	<5dB(A)
Physical	
Fully extended height	3,8m / 12,5ft
Elevation system	Electric
Mast Rotation	340
Mobility	By hand
Dimensions (min.)	358 x 385 x 1088mm
Dimensions (max.)	1303 x 1129 x 3800mm
Weight (Tower only)	BLT-300 36kg/ 79lb
Including battery	BLT-300-S 40,5kg/ 92,6lb BLT-300-D 45kg/ 99,2lb
Wind Resistance	30 m/s (preliminary)
Housing Finish	UV stabilised powder coating
Approvals	
Certifications	CE
Service life L80 B50 (LED)	>100,000 h



MLT K2

SITE LIGHTING

**MAXIMUM LIGHT AND MINIMAL DISTURBANCE
OF SURROUNDINGS**

Third generation site lighting for temporary installations and rough environments. The Mlit is the latest design with advanced ultra asymmetric optics and perfect control of the light. Easy quick connectors and versatile for installations.





BRILLIANT LIGHT

- Dark sky optics minimize disturbance of surroundings
- Versatile optics choose between ultra asymmetric to narrow angle beams
- Advanced optics design reduce glare and light pollution
- Easy to change between symmetric optic solutions
- Recessed optics for better protection

LIGHT CONTROL

- Designed for easy integration with light control solutions



VERSATILE MOUNTING

- Upgraded bracket for more easy installation and more versatile installation



LIGHT WEIGHT

- 20% Smaller and lighter compared to previous generations

BUILT TOUGH



- Robust & Resilient construction.

PERFORMANCE




- IP67 Plug & Play connectors
- Panel connector for power out to next fixture
- Panel connector for dimming prepared for light control




DARK SKY OPTICS

Previous Generation Floodlights

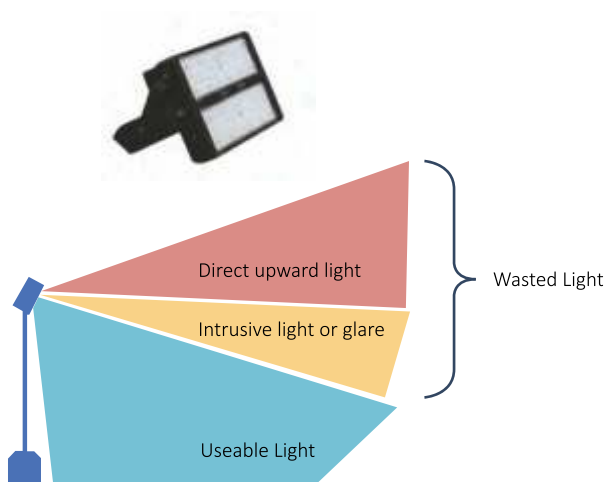

- Components of light pollution.
- Provide less light in desired direction.

MLT K2

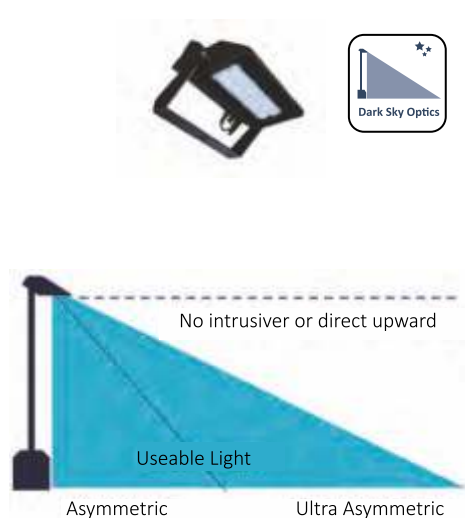

- Delivers further, stronger light throw with **+59%** extra light on the ground.
- No direct upward light when facing ground.
- Minimize glare and disturbance to the local environment and traffic.

Article no:	MLT 130	MLT 300	MLT 600
Light output	21 100lm	43 400lm	86 800lm
System power	135W	310W	620W
Lumen/w	156lm/w	145lm/w	140lm/w
Input voltage	100-305VAC/50Hz	100-305VAC/50Hz	100-305VAC/50Hz
Dimmable	Yes	Yes	Yes
Lifetime (L80, B50)	100 000H	100 000H	100 000H
Color temperature	3/4/6000K	3/4/6000K	3/4/6000K
CRI	>70/ >80	>70/ >80	>70/ >80
Angle beam	9 optics options	9 optics options	9 optics options
IP class	IP66	IP66	IP66
IK class	IK08	IK08	IK08
Ambient temperature	-40 - +45	-40 - +45	-40 - +45
Incoming cable	5m H07RNF with quick connectors	5m H07RNF with quick connectors	5m H07RNF with quick connectors
Material	Aluminium/PC	Aluminium/PC	Aluminium/PC
Wind loading 0° / 23°	0,041 m² / 0,052 m²	0,077 m² / 0,069 m²	0,073 m² / 0,121 m²
Weight	4 kg	9,5 kg	17,5 kg
Dimensions (L x W x H mm):	188 x 314 x 182	309 x 388 x 177	478 x 425 x 197

MLTK2

AUTO LEVELING CRANE LIGHTING

**AUTO LEVELING AND ROBUST LIGHTING WITH
MINIMAL DISTURBANCES OF SURROUNDINGS**

Third generation site lighting for temporary installations and rough environments. Specialized optics for cranes and Auto Leveling making the light always face the ground while the crane is being operated





BRILLIANT LIGHT

- Dark sky optics minimize disturbance for mast and narrow crane optics for arm
- Advanced optics design reduce glare and light pollution
- Easy to change between symmetric optic solutions
- Recessed optics for better protection

LIGHT CONTROL

- Designed for easy integration with light control solutions



VERSATILE MOUNTING

- Auto leveling fixture, adjusts itself while crane is being raised so light is always facing the ground



LIGHT WEIGHT

- 20% Smaller and lighter compared to previous generations

BUILT TOUGH



- Robust & Resilient construction.

PERFORMANCE



- IP67 Plug & Play connectors
- Panel connector for power out to next fixture
- Panel connector for dimming prepared for light control



TECH SPEC



Article no:	MLT 130
Light output	21 100lm
System power	135W
Lumen/w	156lm/w
Input voltage	100-305VAC/50Hz
Dimmable	Yes
Lifetime (L80, B50)	100 000H
Color temperature	3/4/6000K
CRI	>70/ >80
Angle beam	9 optics options
IP class	IP66
IK class	IK08
Ambient temperature	-40 - +45
Incoming cable	5m H07RNF with quick connectors
Material	Aluminium/PC
Wind loading 0° / 23°	0,041 m² / 0,052 m²
Weight	4 kg
Dimensions (L x W x H mm):	188 x 314 x 182

MLT 300	MLT 600
43 400lm	86 800lm
310W	620W
145lm/w	140lm/w
100-305VAC/50Hz	100-305VAC/50Hz
Yes	Yes
100 000H	100 000H
3/4/6000K	3/4/6000K
>70/ >80	>70/ >80
9 optics options	9 optics options
IP66	IP66
IK08	IK08
-40 - +45	-40 - +45
5m H07RNF with quick connectors	5m H07RNF with quick connectors
Aluminium/PC	Aluminium/PC
0,077 m² / 0,069 m²	0,073 m² / 0,121 m²
9,5 kg	17,5 kg
309 x 388 x 177	478 x 425 x 197



MLT BRICK SITE LIGHTING

DESIGNED FOR CONSTRUCTION SITES - PLUG & PLAY FOR TEMPORARY INSTALLATIONS

The popular range installed in hundreds of construction sites, for temporary installations and rough environments. The Mlit Brick is the latest design with advanced optics and perfect control of the light. Easy quick connectors and versatile for installations.





BRILLIANT LIGHT

- Lins technology reduces glare, choose between narrow or wide beam angles
- High lumen output with >160lm/W
- Easy to change between symmetric optic solutions



LIGHT WEIGHT

- Small and robust light system

BUILT TOUGH



- Robust & Resilient construction.

LIGHT CONTROL

- Designed for easy integration with light control solutions



VERSATILE MOUNTING

- Sturdy and vibration resistant bracket



PERFORMANCE



- IP67 Plug & Play connectors
- Panel connector for power out to next fixture
- Panel connector for dimming prepared for light control

RETROFIT LIGHT TOWERS

- Designed for easy replacing of metal halid lights of light towers



MLT 240	MLT 300
38 400lm	52 100lm
240W	320W
160lm/w	162lm/w
100-305VAC/50Hz	100-305VAC/50Hz
Yes	Yes
100 000H	100 000H
3/4/6000K	3/4/6000K
>70/ >80	>70/ >80
9 optics options	9 optics options
IP66	IP66
IK08	IK08
-40 - +45	-40 - +45
5m H07RNF with quick connectors	5m H07RNF with quick connectors
Aluminium/PC	Aluminium/PC
6,4 kg	9,6 kg
381 x 122 x 259	381 x 122 x 369



Application

The specification is applicable to basic performance, technical requirement, testing method, warning and caution of the Lithium ion(LiFePO4) rechargeable battery

Hardware and Terminal Specification

Cell Model

- ➔ Cell structure: Prismatic cell with metal cell coverage.
- ➔ The connection between the terminals of the battery cells by metal terminals using bolt.
- ➔ Uniformity between battery cells in 1 battery Cells must be identical in structure, similar in size and weight.
- ➔ At the time the battery is fully charged, the voltage difference between the cell with the highest and lowest voltage is not more than 0.05V.

High Power SUPPLY ENERGY STORAGE Power Supply

Industrial-Grade Technology Pioneer,
Redefining Industry Standards

3KW/6KW





MPS3 (3kw) / MPS6 (6kw) Battery Pack Specification

Features	Parameters		Remarks
	MPS3	MPS6	
Rated Capacity	60Ah	120Ah	
Rated Voltage	51.2V		
Rating	IP54		
Rated Energy	3072Wh	6000Wh	
Energy Density	160Wh/kg		
Maximum Charging Voltage	43V		
Maximum Discharge Voltage	58.4V		
Standard Charging Current	30A		
Standard Discharging Current	60A		
Maximum Continuous Charging Current	60A		Environmental Temperature $\leq 35^{\circ}\text{C}$
Maximum Continuous Discharging Current	120A		Environmental Temperature $\leq 35^{\circ}\text{C}$
Cycle Life	1800 Cycles		@0.5C Room Temperature
Weight (Approx.)	~47 Kgs	~60 Kgs	
Cooling	Forced Air Cool		
Operating Temperature	Charge $0^{\circ}\text{C} - 45^{\circ}\text{C}$		
	Discharge $-10^{\circ}\text{C} - 60^{\circ}\text{C}$		
Storage Temperature	$-20 \sim 45^{\circ}\text{C}$		≤ 1 months
	$-20 \sim 35^{\circ}\text{C}$		≤ 3 months
	$-20 \sim 25^{\circ}\text{C}$		≤ 12 months



BMS specification

SI.No	Content		Parameters MPS3MPS6		Unit	Remarks
1	Discharge	Continuous Discharge Current	100	200	A	
2	Charging	Charging Voltage	58.4		V	
		Continuous Charge Current	50		A	Adjustable
3	Over Charge Protection	Cell Over Charge Detection Voltage	3.65±0.05		V	
4		Overall Overcharge Protection Release Voltage	3.55		V	
5	Over Discharge Protection	Cell Over Discharge Detection Voltage	2.2±0.05		V	
6		Overall Over Discharge Release Protection Voltage	45		V	
7	Over Current Protection	Discharge Current Level 1 Alarm Current	100±3%		A	Adjustable
		Discharge Current Level 2 Protection Current	125±3%		A	
		Charge Over Current Protection	100±3%		A	
8	Short Circuit Protection	Short Circuit Protection Condition	External Load Short Circuit			
		Short Circuit Protection Delay	200~500μS			
		Short Circuit Protection Release	Removing the Load is Lifted			
		Charging High Temperature Protection	63		°C	
9	Temperature Protection	Charging Low Temperature Protection	0		°C	
		Discharging High Temperature	68		°C	
		Discharge Low Temperature	-20		°C	
		Temperature Sensor	2		Optional up to 4	
		Sleep Current	300μA			



Inverter Specification

	MPS3	MPS6
Rated Power	3000W	5000W
Peak Power	6000W	10,000W
Input Voltage	48VDC	
Output Voltage	100VAC or 110VAC or 120VAC or 220VAC or 230VAC or 240VAC ±5%	
Protection Parameter		
Low Voltage	Alarm at First, Voltage Continuously Reduce, LED Red Light On & Shot Down	
Over Voltage	LED Red Light On, Shut Down	
Over Load	LED Red Light On, Shut Down	
Over Temperature	Alarm at First, Temperature Continuously Rise, LED Red Light On & Shot Down	
Short Circuit	LED Red Light On	
Input Reverse Polarity	Fuse Burn-Out	

Charger Specifications

Sl. No	Items	Specifications	
		MPS3	MPS6
1	Cell Chemistry	LiFePO4	
2	Charging Voltage (V)	58.4	
3	Charging Current (A)	15	30
4	Full Charge (0-100%)	~4Hrs	
5	Charging LED Indication (Green)	4 LEDs Blinking (30%, 50%, 80%, 100%)	
6	Fault LED Indication (Red)	1 LED Blinking	
7	Charging Completed (Green)	4 LEDs Constant Glowing	



Cell Specification

SI.No	Items	Specifications		Test Tools
		MPS3	MPS6	
1	Maximum Charge Voltage	3.65±0.05V		Digital Multi Meter
2	Minimum Discharge Voltage	2.5±0.05V		Digital Multi Meter
3	Initial Capacity	Nominal Capacity 0.5C		Secondary Batteries Testing Equipment
4	AC Impedance	≤20mΩ		Impedance Test Equipment
5	Charging Standard	0.5C Maximum Charging Voltage		Secondary Batteries Testing Equipment
6	Charging Time	Standard: 2.4 Hours		Secondary Batteries Testing Equipment
7	Discharge Standard	0.5C Discharge		Secondary Batteries Testing Equipment
8	Cell Dimension (L*H)	34 x 207mm	130.3 x 195.5mm	Vernier Caliper

Storage and Transportation

Items		Requirement
Storage Temperature	≤1 month	-20 ~ 45°C
	≤ 3 months	-20 ~ 35°C
Humidity		<70%RH
Storage SOC		60% - 75% SOC



ABOUT MTANDT

For The Ones Who Get it Done

Since 1974, we've been the partner you can count on. Founded by the **Late Sri Rajkumar Modi**, Mtandt Group was born with a simple goal: to make your work safer, more efficient, and more convenient - whether you're Building, Maintaining, Repairing, or Operating Facilities and Infrastructure.

Our team brings together expertise in **Manufacturing, Sales, Rentals, Training, and Services** to create solutions that actually work for your unique challenges. Our leaders have walked in your shoes and understand the real-world problems you face every day, which is why we're committed to providing support that's both strategic and practical.

Through our various **Business Units, Subsidiaries, and Joint Ventures**, we connect directly with you to solve problems.

When you want to be sure and get more.



AUTHORISED PARTNER

For more information on Mlit mobile light towers and power stations

CONTACT US

TRISTAR UVS

abyjoseph@tristarUvs.com | www.tristarUvs.com

Chennai, Tamil Nadu, India